




Savio Boiler Specifications		
Model	Savio Heat Only	Savio FP
Efficiency	82%	82%
Maximum Heat Input	122,800	122,800
Minimum Heat Input	49,500	49,500
Maximum Heat Output	100,700	100,700
Sealed Combustion	Yes	Yes
Ignition	Electronic Spark	Electronic Spark
Anti Frost Device	Yes 41°F on 95°F off	Yes 41°F on 95°F off
Maximum Pressure psi	30 psi	30 psi
Temperature Regulation System Range	100° - 185°F	100° - 185°F
Dimensions	Height	27-3/4"
	Width	15-3/4"
	Depth	12-5/8"
Domestic Water Flow Rate Δ@ 70°	N/A	3.0 GPM
Domestic Water Temperature	N/A	95°-130°
Domestic Water Pressure	N/A	5 – 145 psi
Clearances Combustibles	CLOSET	CLOSET
	Front	3"
	Back	0"
	Top	10"
	Sides	2"
	Bottom	8"
Net Weight lbs.	79 lbs.	79 lbs
Gas Type	NG/LP	NG/LP
Voltage	120 VAC/60Hz	120 VAC/60Hz
Water Content	≤ 1 gallon	≤ 1 gallon

SAVIO SAFETY FEATURES

- Safety flow switch to prevent thermal shock
- 3 way valve to prioritize domestic water
- Stainless steel burner
- Electronic spark ignition
- Built in expansion tank
- Built in overheat thermostat
- Built in bypass to assure the required flow through the heat exchanger

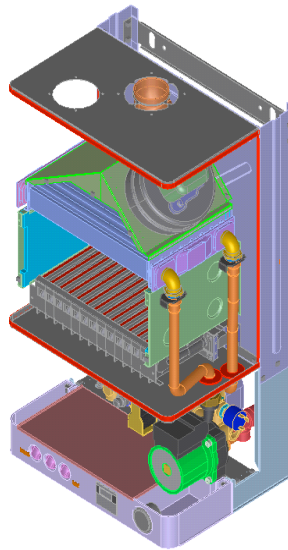

- ASME CERTIFIED coated copper primary heat exchanger
- Built in air purge valve
- Built in air pressure switch
- Built in pump exerciser every 24 hours
- Built in frost protection



156 Holly Road, Boyertown, Pa. 19512

Phone 610-369-1450 Fax 610-367-6800